


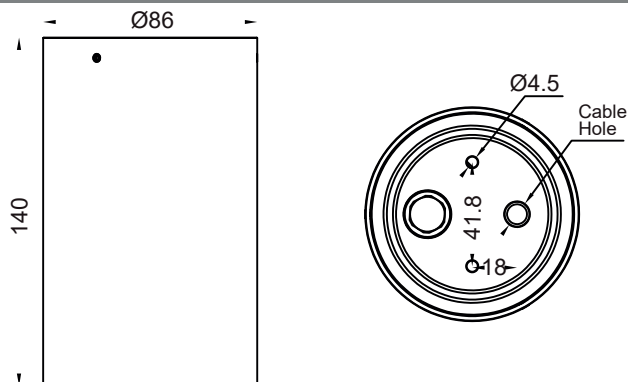

Physical Dimension(MM)

MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	BEAM ANGLE	INPUT VOLT	CONTROL
EST-SM860115A	15W/20W/22W /24W	1PCS CREE /BRIDGELUX /CITILED COB	2700-6500K	15°/24°/38° (Reflector Cup)	AC220-240V /AC110-240V	ON/OFF /Triac/0-10V/DALI
EST-SM860110A	10W/15W				AC110-130V	Triac
EST-SM860115B	15-24W				DC24V/DC36V /DC48V	ON/OFF 0-10V/DALI/DMX512
EST-SM860124A	15-24W	1PCS BRIDGELUX COB	Tunable White 2700/6500K	15°/24°/36°/60° (Lens)	DC48V	DALI/PWM/DMX512
EST-SM860115C	15W/20W/22W /24W	1PCS CREE /BRIDGELUX /CITILED COB	2700-6500K		AC220-240V /AC110-240V	ON/OFF /Triac/0-10V/DALI
EST-SM860110B	10W/15W				AC110-130V	Triac
EST-SM860115D	15-24W				DC24V/DC36V /DC48V	ON/OFF 0-10V/DALI/DMX512
EST-SM860124B		1PCS BRIDGELUX COB	Tunable White 2700/6500K	DC48V	PWM/DMX512	
EST-SM860124C		1PCS TYANSHINE COB	RGB 3in1	DC24V/DC48V		
EST-SM860130	15-30W		RGBW 4in1 (W:6500K)			

Material Specifications

Housing: CNC 6063# aluminum.

T=60-80µm Adhesion of ISO class 1/ASTM class 48.

Gasket: Tooling shaped double silicone seal.

Dimmable: Triac/Dali/0-10V/PWM/DMX512.

Working Temperature: -20 to 40C. °



Squared Shape & Painting Color



COB Lens

Features



High colour
rendering index



Excellent thermal
management



Dimmable versions
available



EMC-optimised