


LED Neon Flex Series

RLLNFTB1010 PU


High quality and high brightness SMD LED chip.
Environmentally friendly & energy efficient.
High color consistency & smooth illumination With invisible light dots.
Perfect softness, gentle emitting, Not dazzling.



Specifications

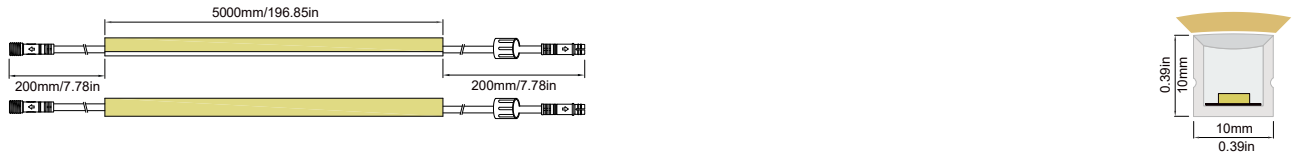

Fittings



Aluminium tank

Item NO JA0026
Dimension: 1000*11.9*14mm
Material Aluminium



Transparent accessories

Item NO JK0022
Dimension: 20*12.2*8.5mm
Material 316 Stainless steel



Bendable Stainless Steel Profile

Item NO JL0003
Dimension: 1000*1.5*5mm
Material 304 Stainless steel



Rubber Sleeve

Item NO JL0003
Dimension: 12*12*8mm
Material Silica Gel



Screw

Item NO JS0001
Dimension: 3*16mm
Material 316 Stainless steel



Stainless Steel buckle


Item NO JL0014
Dimension: 10*11.94*7.5mm
Material 6063Al

Application



Luminaire Photometric Data

Luminous intensity distribution diagram

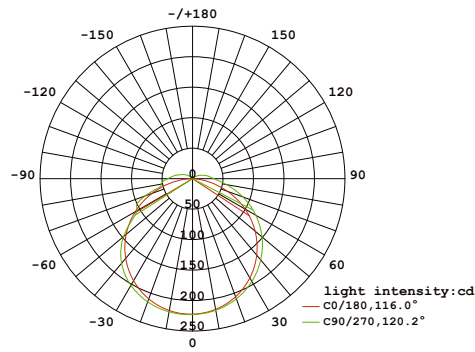


AVERAGE BEAM ANGLE(50%):118.1°

Connection Methods



Datasheet



Model No.	CCT	LED Model	LEDs/M	Typ. Colour Temp	Power (W/M)	Lumens (lm/M)	CRI	Unit Length	FPC Width	Maximum connection length
NF-C27120C-A	2700K	2835	120	2600-2800	10.0	700	90	50	6	5M/Roll
NF-C30120C-A	3000K	2835	120	2850-3300	10.0	710	90	50	6	5M/Roll
NF-C40120C-A	4000K	2835	120	3850-4400	10.0	720	90	50	6	5M/Roll
NF-C50120C-A	5000K	2835	120	4800-5400	10.0	720	90	50	6	5M/Roll
NF-C65120C-A	6500K	2835	120	5600-7000	10.0	710	90	50	6	5M/Roll
NF-CRE120C-A	Red	2835	120	620-625nm	10.0	225		50	6	5M/Roll
NF-CGR120C-A	Green	2835	120	520-525nm	10.0	289		50	6	5M/Roll
NF-CBL120C-A	Blue	2835	120	460-465nm	10.0	163		50	6	5M/Roll
NF-CYE120C-A	Yellow	2835	120	590-595nm	10.0	378		50	6	5M/Roll
NF-CPI120C-A	Pink	2835	120	-	10.0	386		50	6	5M/Roll
NF-COR120C-A	Orange	2835	120	600-610nm	10.0	208		50	6	5M/Roll
NF-CTW120C-A	WW-CW	2835	120	2700-6500	2*8	465	90	50	6	5M/Roll
NF-GRG120C-A	RGB	3535	120	RGB	12.0	323		50	6	5M/Roll